
## **Aluminium T-Bar**

These ingots are used by factories which are able to remelt solid aluminium for producing electrical conductors (E.C) and other fabricated parts, household appliance, cables and etc. These are produced in different types: pure and 1350 AA.



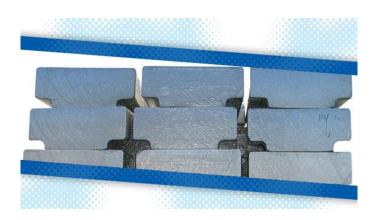

The length can be changed at to the customer's request

|         |        | Gr          | ade   | E.C |       |
|---------|--------|-------------|-------|-----|-------|
|         |        | composition |       |     |       |
|         |        | Si          | 0.08  | Mg  | 0.002 |
|         |        | Fe          | 0.20  | Zn  | 0.013 |
| ast no. | 100181 | Cu          | 0,009 | Ti  | 0.002 |
| QC      | ОК     | Mn          | 0.002 | etc | 0.02  |

| weight | 657 kg |
|--------|--------|
| length | 940 mm |
| width  | 850 mm |

